
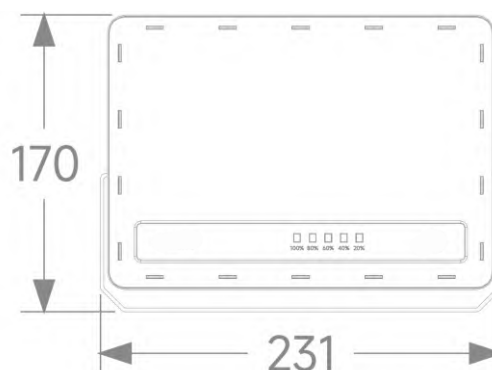



LULP-FL01--50W

Power:	50W
Solor Panel Power:	Class A mc-Si 5V/15W
Power Factor:	≥0.95
Battery:	3.2V/10AH-LFP Battery
Battery Life	18-24H
LED Light Source:	MLS
Luminous Flux:	1000lm
Color TemperatureL:	6500K
Color Rendering Index:	CRI≥80
Beam Angle:	90°
Operating Temperature Range:	-40℃ to +50℃
Operating Humidity Range:	10 to 60%RH
Storage Temperature Range:	-40℃ to +50℃
Life Span:	30000Hrs
Housing Material:	Aluminium+PC
IP Rating:	IP66
Illumination area:	100m ² /5m
Lamp Dimension (mm):	231×51×170mm
Solor Panel Dimension (mm):	290×350mm
Packing Dimension (mm):	705×436×415mm-8pcs
Net Weight (kg):	0.9kg/pcs
Gross Weight (kg):	17.5kg/ctn

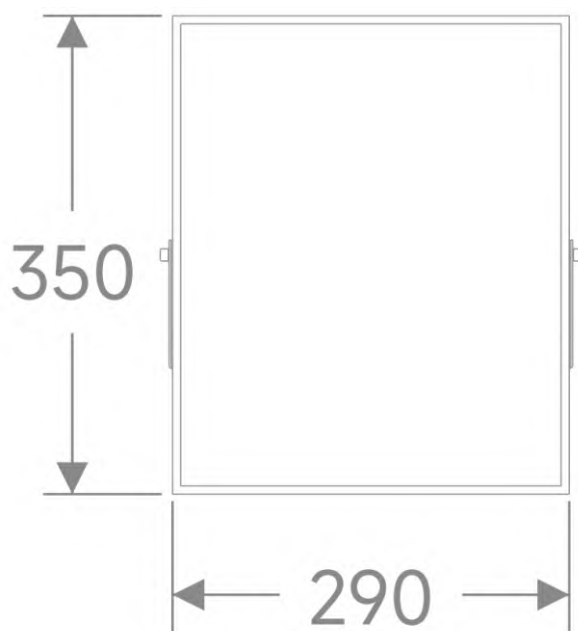

LULP-FL01-100W

Power:	100W
Solor Panel Power:	Class A mc-Si 5V/20W
Power Factor:	≥0.95
Battery:	3.2V/15AH-LFP Battery
Battery Life	20-30H
LED Light Source:	MLS
Luminous Flux:	1200lm
Color TemperatureL:	3000K/4000K/6500K
Color Rendering Index:	CRI≥80
Beam Angle:	90°
Operating Temperature Range:	-40℃ to +50℃
Operating Humidity Range:	10 to 60%RH
Storage Temperature Range:	-40℃ to +50℃
Life Span:	30000Hrs
Housing Material:	Aluminium+PC
IP Rating:	IP66
Illumination area:	200m ² /7m
Lamp Dimension (mm):	276×56×200mm
Solor Panel Dimension (mm):	400×350mm
Packing Dimension (mm):	825×435×473mm-8pcs
Net Weight (kg):	1.2kg/pcs
Gross Weight (kg):	22kg/ctn

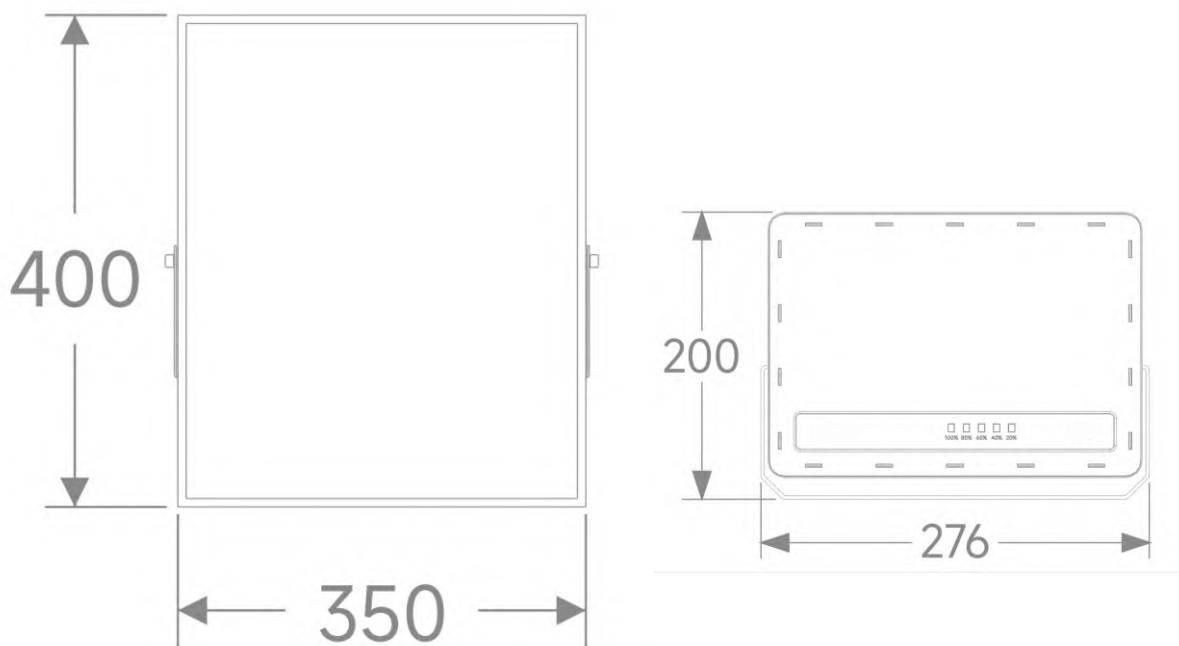

LULP-FL01-200W

Power:	200W
Solor Panel Power:	Class A mc-Si 5V/25W
Power Factor:	≥0.95
Battery:	3.2V/20AH-LFP Battery
Battery Life	20-30H
LED Light Source:	MLS
Luminous Flux:	1500lm
Color TemperatureL:	3000K/4000K/6500K
Color Rendering Index:	CRI≥80
Beam Angle:	90°
Operating Temperature Range:	-40℃ to +50℃
Operating Humidity Range:	10 to 60%RH
Storage Temperature Range:	-40℃ to +50℃
Life Span:	30000Hrs
Housing Material:	Aluminium+PC
IP Rating:	IP66
Illumination area:	400m ² /10m
Lamp Dimension (mm):	315×63×235mm
Solor Panel Dimension (mm):	600×350mm
Packing Dimension (mm):	546×423×683mm-5pcs
Net Weight (kg):	1.5kg/pcs
Gross Weight (kg):	17.5kg/ctn

