

CLC SERIES

LED CEILING LIGHT



Aluminum Frame



Sensor Function



High Color Index



UGR<19



IP44 for indoor





SPECIFICATION

LED CEILING LIGHT CLC SERIES

Features



- Low consumption; High Efficiency upto 160lm/W
- Low light decay, Long lifetime 50,000Hours
- Power DIP Switch, CCT DIP Switch
- Aluminum frame
- Easy Connection installation
- Prismatic Cover UGR<19
- Warranty 5years

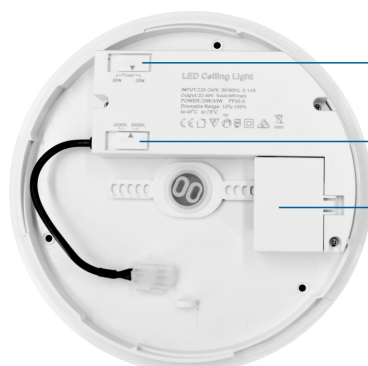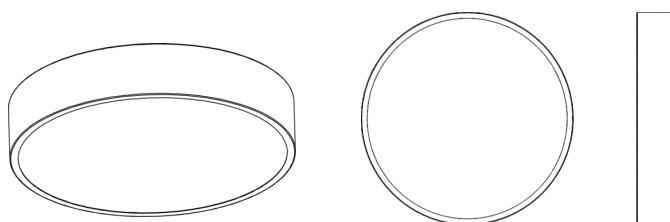


➤ POWER DIP SWITCH

➤ CCT DIP SWITCH

➤ IP44 cap with fast connector

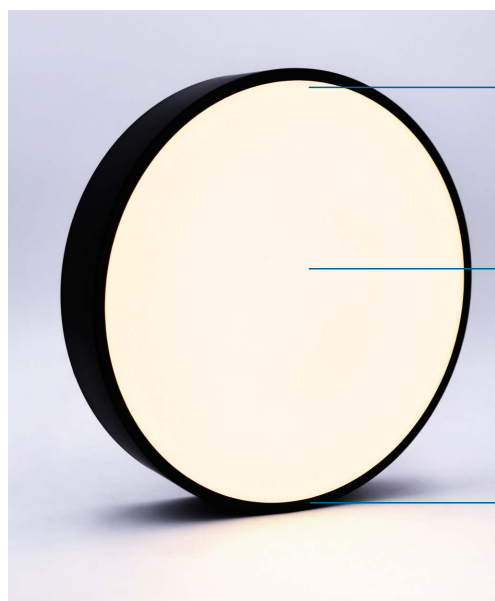

➤ Full LED Board
High Lumen upto 160lm/W SDCM<3




➤ Prismatic Diffuser, UGR<19



➤ Aluminum Frame
Texture Matt finish. Different Finish available

PARAMETER

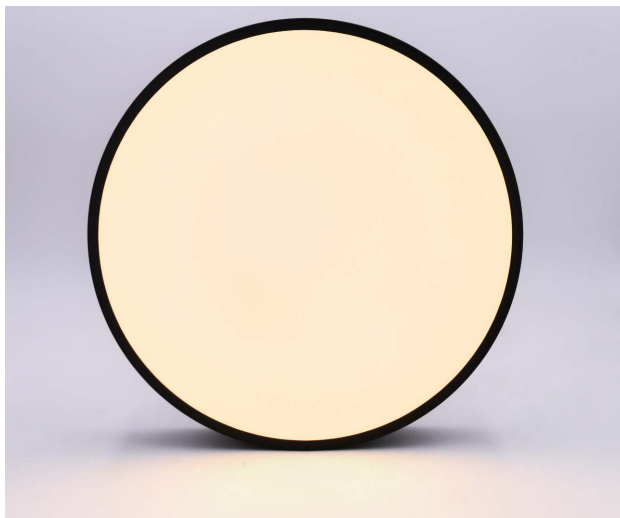

Model No.	LU-CLC300	LU-CLC400	LU-CLC600	LU-CLC800	LU-CLC1000
Size(mm)	W300*H65mm	W400*H65mm	W600*H65mm	W800*H65mm	W1000*H65mm
Rated Power	15/20W	20/30W	40/50W	60/70W	80/100W
Material	Aluminum Frame with Prismatic Cover				
Insulation Class	Class I				
Finished	Black / White (customized)				
Input Voltage	AC220-240V 50/60Hz (Emergency dual Power Available)				
P.F.	0.95				
LED Type	SMD2835				
Luminous Efficiency	120lm/W 160lm/W				
CRI	>80Ra / >90Ra / >97Ra				
Beam Angle	100°				
UGR	UGR<19 @2H				
SDCM	SDCM<6				
IP IK Level	IP44 IK03				
Function available	DALI / Triac				
Power Dim	DIP POWER				
CCT Dim	DIP CCT(3000K 4000K 5000K)				
Microwave Sensor	Available				
Operating Temperature	-10°C~+45°C				
Operating Humidity	10~90%RH				
Warranty	5 years				

INSTALLATION

Surface



Suspended



Embedded

