

CLD SERIES

LED CEILING LIGHT

24W/36W/50W



Frameless Design



Soft lighting Cover



High Color Index



Anti-Flame Materials



IP54 waterproof




SPECIFICATION

LED CEILING LIGHT CLD SERIES

Features

- Low consumption; High Efficiency
- Low light decay, Long lifetime 50,000Hours
- CCT DIP Switch
- Sensor Function with Photosensitivity
- Easy Connection installation
- Frameless design
- Anti-Flame Materials

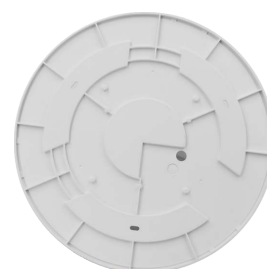


- Sensor DIP SWITCH
- Photosensitivity threshold setting




1/2: Sensing distance setting		
3-4m	ON	ON
2-3m	OFF	ON
1-2m	ON	OFF
Always on	OFF	OFF

3/4: Sensing delay time setting		
30S	ON	ON
3min	OFF	ON
5min	ON	OFF
10min	OFF	OFF


5/6: Photosensitivity threshold setting		
< 10lux	ON	ON
< 30lux	OFF	ON
< 50lux	ON	OFF
Turn off photosensitivity	OFF	OFF

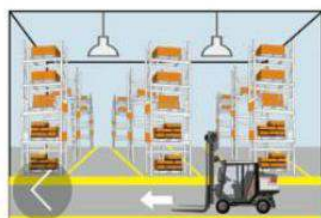


1. When it's bright enough, the light won't be on even detecting movements

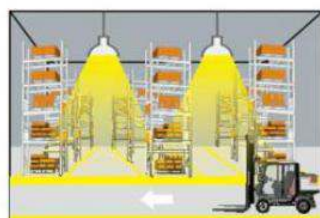

2. When it's not bright enough, the light will be on when detecting movements

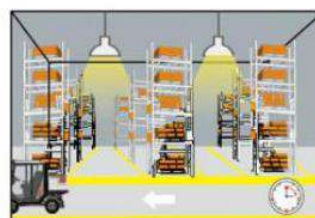


3. After delay time, when no movements, the light will dim down to a set brightness.

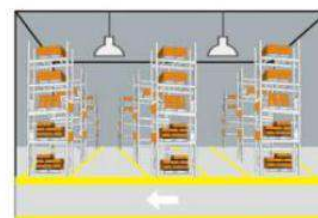


4. After delay time, when no more movements, the light will be off.

PARAMETER

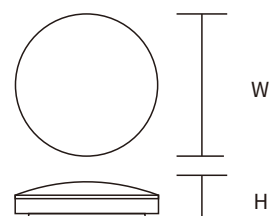

Model No.	LU-CLD250	LU-CLD300	LU-CLD380
Material	PS		
Size(mm)	W250*H55mm	W300*H55mm	W380*H60mm
Rated Power	12W	15W	28W
Finished	Black / White		
Input Voltage	AC220-240V 50/60Hz		
P.F.	0.9		
LED Type	SMD2835		
Luminous Efficiency	>90lm/W		
Luminous	900-1000lm	1200-1400lm	2350-2650lm
CRI	>80Ra / >90Ra		
Beam Angle	100°		
IP Level	IP54		
CCT Dim	DIP CCT(3000K 4000K 5000K)		
Microwave Sensor	Available	Available	NO
Operating Temperature	-20°C~+40°C		
Operating Humidity	10~90%RH		
Warranty	5 years		



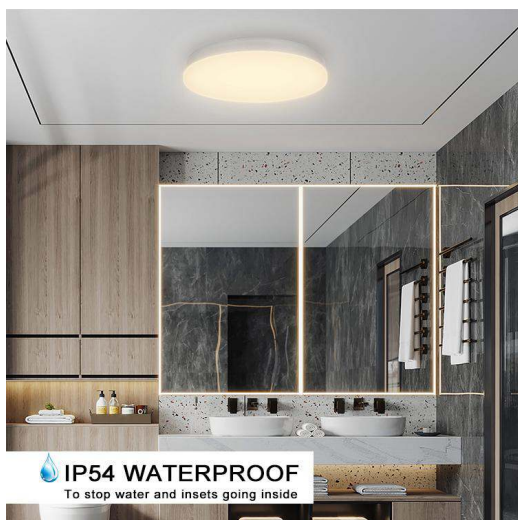

EASY INSTALLATION

