




LU-TPB

LED Single line B type Triproof lighting

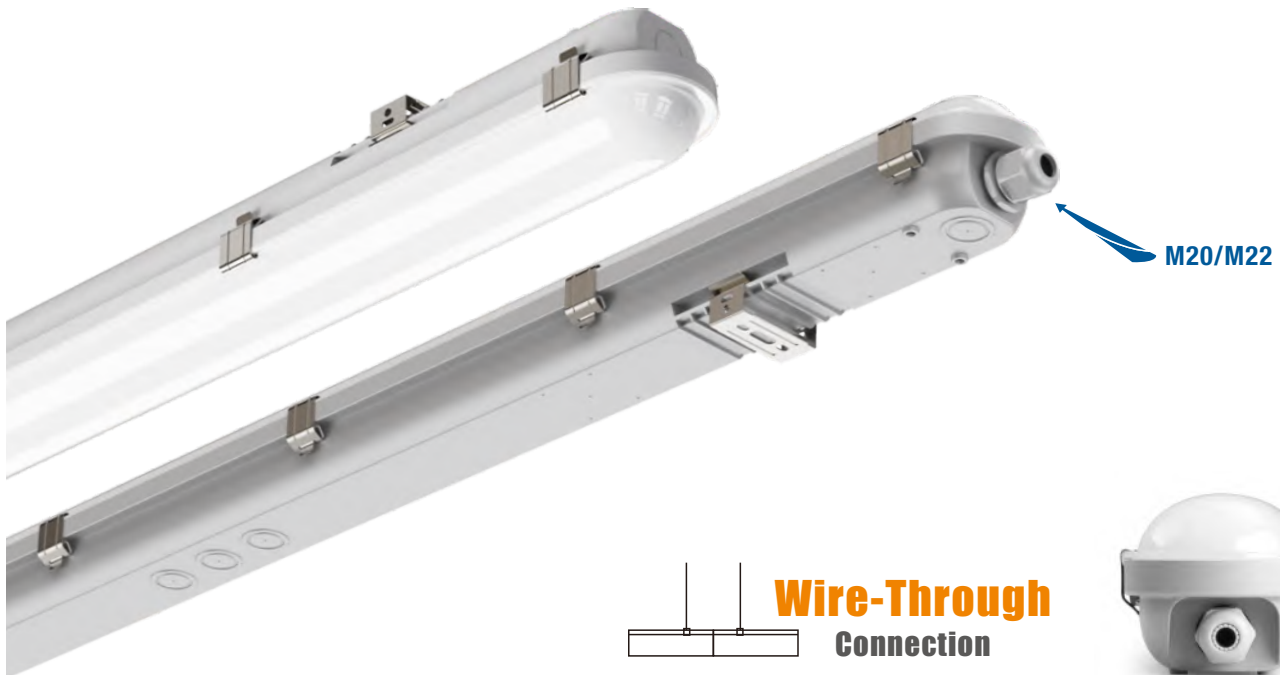


- Built with a tough, air-tight enclosure allowing it to resist jets of water and dust an essential feature for outdoor lighting & Industry lighting.
- Low consumption; More than 80% saving of the power
- Low light decay, Long lifetime 50,000Hours
- Water-proof, Dust-proof, Damp-proof, Vapor-proof, IP66
- High impact test, IK10
- Self-wiring connection/ Linkable.
- Easy to install

| | |
|----------------------------|---|
| Power: | 10-60W |
| Nominal Efficiency: | 130lm/W |
| Cover | Milky White Cover Clear Cover |
| CCT: | 2700K - 6500K / CCT Dimmable |
| CRI: | 70/ 80/ 90/ Ra |
| UGR: | / |
| Beam Angle: | 120° |
| Input Voltage: | AC220-240V 50/60Hz / AC90-265V 50/60Hz |
| Finished Color: | Grey |
| Options: | 0-10V / DALI Motion Sensor/ Emergency |

Flexibility

LUCCA supply Different Connector and clips depends on Client's request.

Now we have PC Connector and Metal Connector for you option.
And for Clips, LUCCA provide multi different clip for your project.

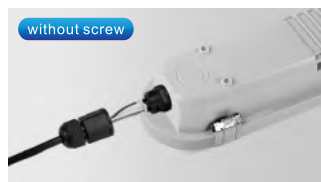

PC Connector



Metal Connector




Metal Safety clip




Metal Clip

Technology Data

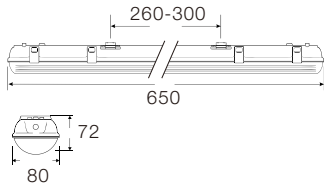


LU-TPB-06

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|------------|---------|-----------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB-06 | 10W | PC | 130m/W | 60 | 600*80*72 | 8 | 1kg |
| LU-TPB-06 | 20W | PC | 130m/W | 120 | 600*80*72 | 8 | 1kg |

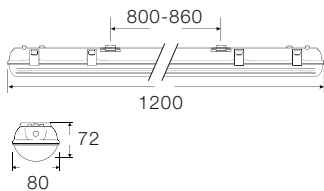


LU-TPB-12

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|------------|---------|------------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB-12 | 20W | PC | 130m/W | 120 | 1200*80*72 | 12 | 1.4kg |
| LU-TPB-12 | 40W | PC | 130m/W | 240 | 1200*80*72 | 12 | 1.4kg |

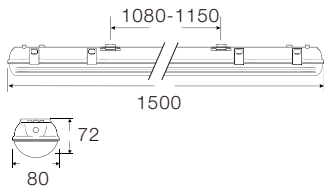

LU-TPB-15

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|------------|---------|------------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB-15 | 30W | PC | 130m/W | 180 | 1500*80*72 | 14 | 1.8kg |
| LU-TPB-15 | 50W | PC | 130m/W | 360 | 1500*80*72 | 14 | 1.8kg |

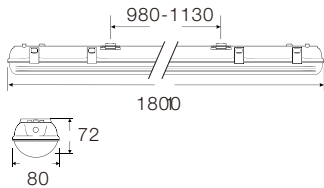










LU-TPB-18

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|------------|---------|------------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB-18 | 50W | PC | 130m/W | 216 | 1800*80*72 | 18 | 2.3kg |
| LU-TPB-18 | 60W | PC | 130m/W | 432 | 1800*80*72 | 18 | 2.3kg |



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

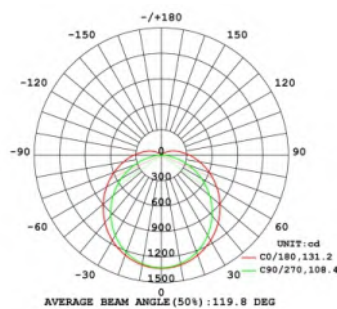

| | | | |
|--------------------|--|-----------------------|--|
| LED: 60pcs |  | 560x16MM-2835-5B12C | |
| LED: 120pcs |  | 560x32MM-2835-10B12C | |
| LED: 120pcs |  | 1160x16MM-2835-10B12C | |
| LED: 240pcs |  | 1160x32MM-2835-20B12C | |
| LED: 180pcs |  | 1460x16MM-2835-15B12C | |
| LED: 360pcs |  | 1460x32MM-2835-30B12C | |
| LED: 216pcs |  | 1760x16MM-2835-18B12C | |
| LED: 432pcs |  | 1760x32MM-2835-36B12C | |





LU-TPB(PRO)

LED Single line B(PRO) type Triproof lighting



M20/M22

**Wire-Through
Connection**



- Built with a tough, air-tight enclosure allowing it to resist jets of water and dust an essential feature for outdoor lighting & Industry lighting.
- Low consumption; More than 80% saving of the power
- Low light decay, Long lifetime 50,000Hours
- Water-proof, Dust-proof, Damp-proof, Vapor-proof, IP66
- High impact test, IK10
- Self-wiring connection/ Linkable.
- Easy to install

| | |
|----------------------------|---|
| Power: | 10-60W |
| Nominal Efficiency: | 130/ 150lm/W |
| Cover | Milky White Cover Clear Cover |
| CCT: | 2700K - 6500K / CCT Dimmable |
| CRI: | 70/ 80/ 90/ Ra |
| UGR: | / |
| Beam Angle: | 120° |
| Input Voltage: | AC220-240V 50/60Hz / AC90-265V 50/60Hz |
| Finished Color: | Grey |
| Options: | 0-10V / DALI Motion Sensor/ Emergency |

Flexibility

LUCCA supply Different Connector and clips depends on Client's request.


Now we have PC Connector and Metal Connector for you option.
And for Clips, LUCCA provide multi different clip for your project.




PC Connector




Metal Connector

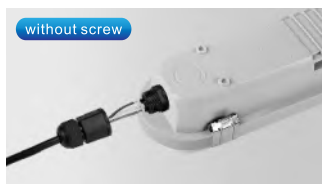




LU-TPB(PRO)-06

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|-------------|---------|-----------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB(PRO)-06 | 10W | PC | 130/150lm/W | 60 | 600*95*80 | 6 | 1.2kg |
| LU-TPB(PRO)-06 | 20W | PC | 130/150lm/W | 120 | 600*95*80 | 6 | 1.2kg |




LU-TPB(PRO)-12

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|-----------------|---------|------------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB(PRO)-12 | 20W | PC | 120/130/150lm/W | | 1200*95*80 | 10 | 2kg |
| LU-TPB(PRO)-12 | 40W | PC | 130/150lm/W | 240 | 1200*95*80 | 10 | 2kg |
| LU-TPB(PRO)-12 | 54W | PC | 130/150lm/W | | 1200*95*80 | 10 | 2kg |




LU-TPB(PRO)-15

| Model No. | Power | Materials | Efficiency | LED Qty | Dimension | Clips | N.W./Pcs |
|-------------------------|-------|-----------|-------------|---------|------------|-------|----------|
| LED Chips- Philips 2835 | | | | | | | |
| LU-TPB(PRO)-15 | 30W | PC | 130/150lm/W | 180 | 1500*95*80 | 12 | 2.15kg |
| LU-TPB(PRO)-15 | 60W | PC | 130/150lm/W | 360 | 1500*95*80 | 12 | 2.15kg |

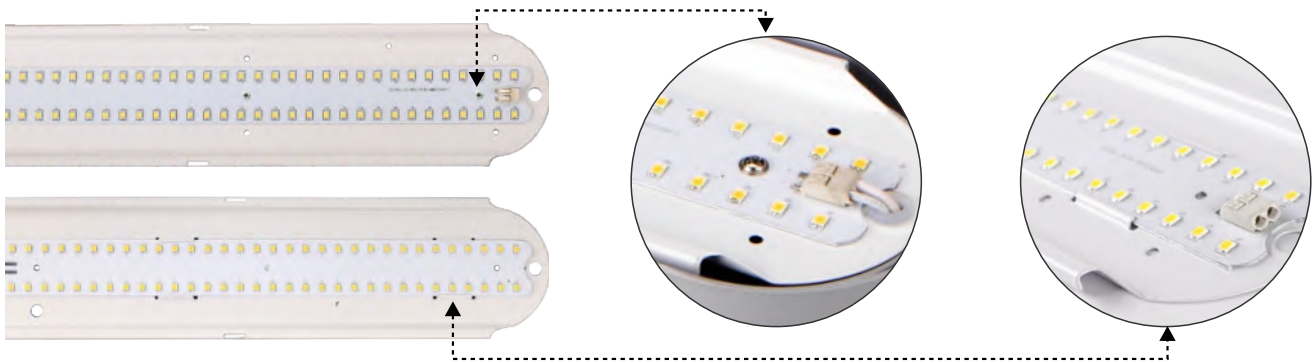


LED: 120pcs




560X32MM-2835-10B12C

LED: 240pcs



1160X32MM-2835-20B12C

LED: 360pcs



1460X32MM-2835-30B12C

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

