

IP66 LED Wall Pack WLS



LIFUD

MW
MEAN WELL

SAMSUNG

PHILIPS



SPECIFICATION

IP66 LED Wall Pack WLS



Caution





- Please read the user manual before installation.
- Please install, connect and test the lamp according to local regulations, Lamps should always be installed or replaced with care by professional person.
- Ensure the power is switched off before installation.
- Please check whether the lamps are broken or not during shipping, broken items cannot be used anymore.
- Please keep the lamps and accessories away from kids to avoid hurt by mistakes.
- For protecting eyes, please do not watch the luminous surface for a long time,
- Do not cover anything on lamp and keep lamps away from fire or high temperature objects.
- Incorrect installation and using, keep the right to refuse after-sales service for those disassembled or repaired items.
- Switch the power off and cool down the lamp before cleaning.
- The lamp is only suitable for weak acid and weak base environment.

Features

- Water-proof, Dust-proof, Damp-proof, Pressure-proof.
- High luminous efficiency 130LM/W.
- Excellent heat dissipation support stable quality.
- Convention installation for linking in series.
- High impact test, IK10.
- Long lifespan 100,000 hours.
- Energy saving up to 80%.
- 5 years warranty.

Application

- | | |
|-------------------------------|-------------------|
| ➤ Parking place | ➤ Airport |
| ➤ Tunnel / Corridor / Gallery | ➤ Exhibition Hall |
| ➤ Railway / Bus / MTR Station | ➤ Supermarket |
| ➤ Warehouse / Factory | ➤ Gas station |

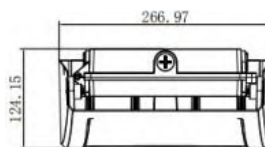

10W/20W/30W

70W/100W

Temperature Characteristics T-ambient 40°C

Temperature


Operating: -20 ~ +50°C

Storage: -40 ~ +85°C


PARAMETER

Model No.	LU-WLR-20W/30W/70W/100W
Material	Body: Cast Aluminum Optic: Polycarbonate optic lens
Paint	Bronze / Black / White
Size(mm)	20W/30W : 205*145*98mm 70W:286*216*110mm 100W:330*267*124mm
Input Voltage	AC85-265V
Power	10W/20W/30W/70W/100W
Chips	SMD2835
Driver	Meanwell Driver / LUCCA Driver
P.F.	>0.9
Luminous Flux	2600/3900/9100/13000lm
Luminous Efficiency	130lm/W
CRI	>80Ra
Beam Angle	10-30W:TypeIII (U04201) 70W/100W:TypeIII(R08401)
IP Level	IP66
Rotatable	0-90°


PARAMETER

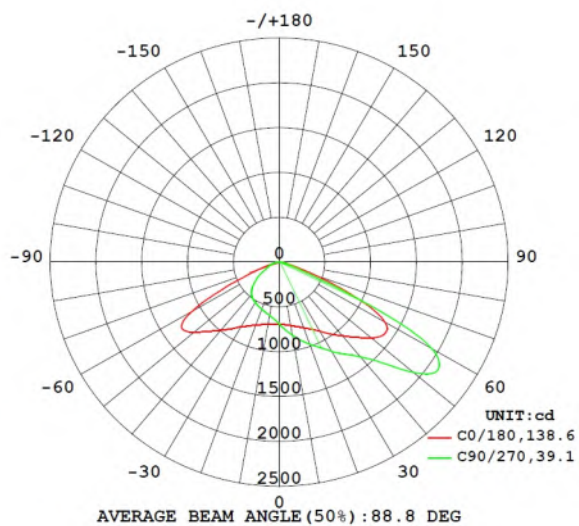





10W/20W/30W:U04201

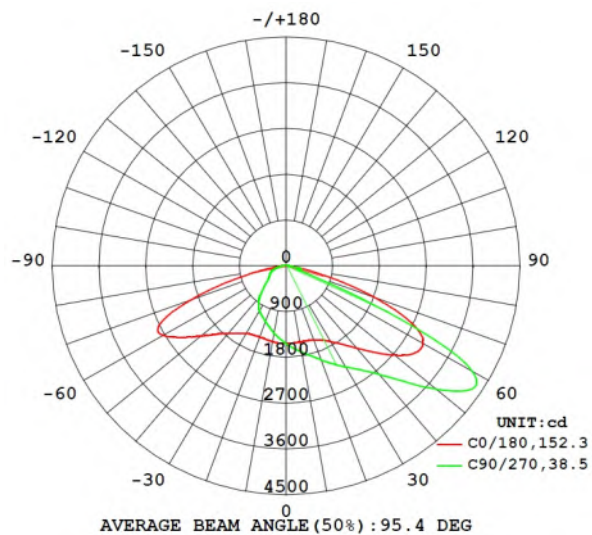

40W/100W : R08401

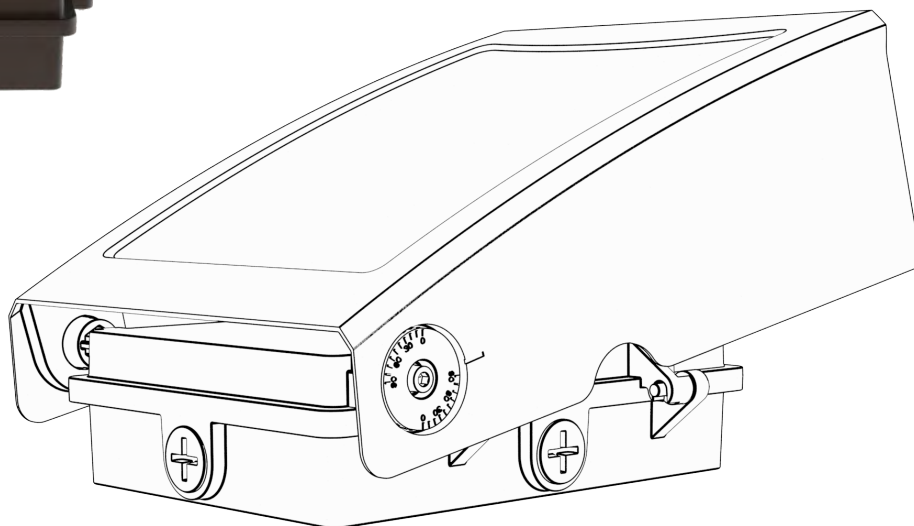

INSTALLATION INSTRUCTIONS

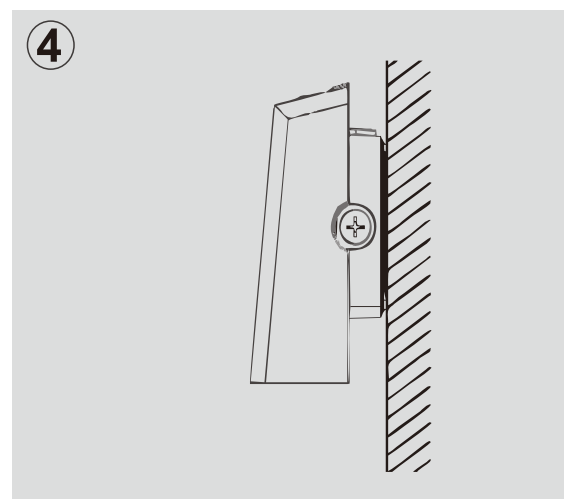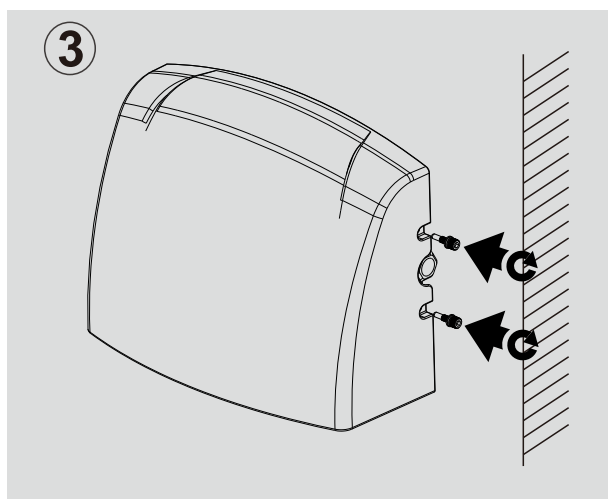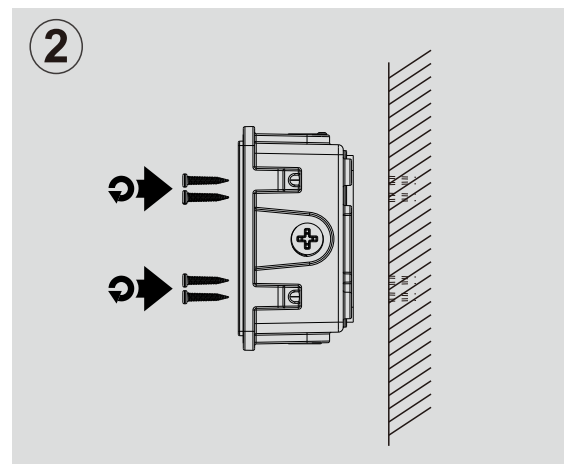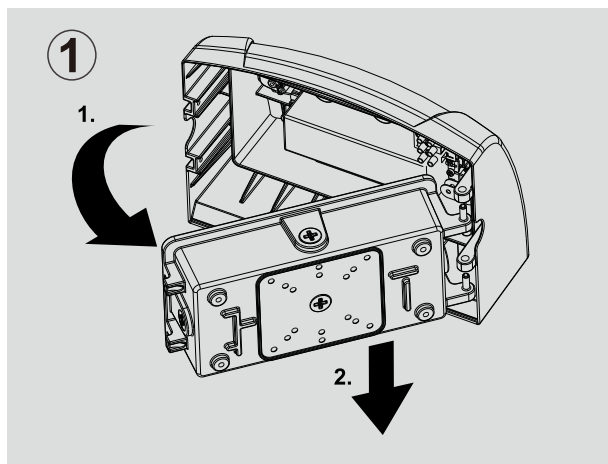

PACKAGE

Item code	Pcs/Ctn	Carton Size	G. W. (kg) / CTN
LU-WLR-20W	4	380*260*440mm	5.9kg
LU-WLR-30W	4	520*310*260mm	6.0kg
LU-WLR-70W	2	520*310*260mm	6.0kg
LU-WLR-100W	2	520*310*260mm	6.5kg